


# United Divers Pvt. Ltd.

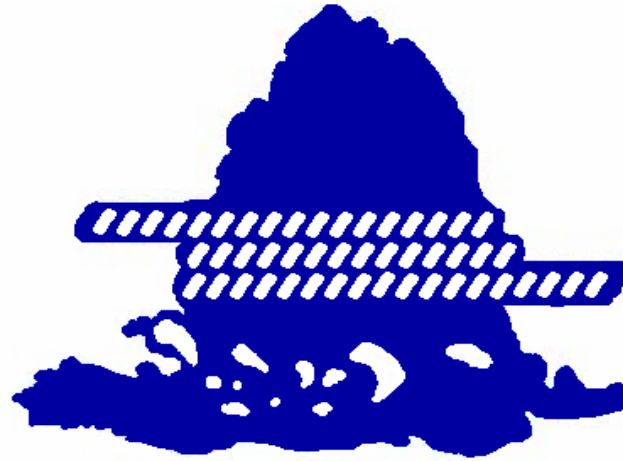

## Company Experience

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
1	ONGC/ SCI	Nov '88 to Jul '90	S.P.M removal & Installation at Sub - Sea templates & maintenance, pipeline and manifold inspection, N.D.T. inspection , Submarine pipeline maintenance Job, M.G.R removal from jackets and pipelines, locating an arresting Oil leak in nil visibility conditions, Riser survey and inspection, baseline inspection of jackets, underwater videography maintenance & installation works, inspection, maintenance of Offshore structures including spider deck and riser moorings & demoorings of tankers on S.B.M and other diving services desired by ONGC by using Dynamically Positioned Diving vessel "SAMUNDRA SEVAK	Yes	Completed Succesfully
2	ONGC/ DUKE OFFSHORE	Jun '89 to Oct '89	Diving Services on Drill ship "SAGAR VIJAY" using saturation system.	Yes	Completed Succesfully
3	ONGC/ STENA/ ESSAR	Sep '89 to Oct '89	S.P.M installation Subsea templates. Subsea templates and maintenance of SPM Hoses, submarine pipeline inspection jobs using cathodic potential meter, ultrasonic meter, Magnetic Particle inspection, videography, Subsea buoy, hoses and pipeline end manifold using ESSAR owned DPDSV "NAND REWANT".	Yes	Completed Succesfully
4	ONGC/ SAMPROGETTI, ITALY	Jan '90 to Feb '90	Platform modification at BLQ - II in Bomabay High.	Yes	Completed Succesfully
5	ONGC/ ESSAR SHIPPING	Jan '90 to Apr '90	Maintenance , repair & installation works , MGR removal, pipeline NDT inspection, maintenance of S.P.M and mooring & demoorings of tankers.	Yes	Completed Succesfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
6	ONGC/ STENNA/ ESSAR	Feb '90 to Apr '90	Pipe laying , riser inspection , installation of jackets by using Derrick Barge "D.B. HELLARIS".	Yes	Completed Succesfully
7	ONGC/ ROCK WATER	Mar '90 to Jun '90	MGR removal from pipeline NDT inspection & sealed survey, submarine pipeline maintenance jobs.	Yes	Completed Succesfully
8	ONGC/ ESSAR	May '91 to Jul '93	S.B.M Installation & removal of subsea templates and its maintenance, riser and conductor clamp and anode installations, MGR removal from jackets & pipelines, gripper job, NDT Inspection of jackets & pipeline, maintenance of offshore structures using Dynamically positioned vessel MSV "NANDSHAMIK"	Yes	Completed Succesfully
9	ONGC/ PEERLESS	Aug '93 to Sep '96	SBM removal and installation at Sub Sea templates and maintenance of SPM hoses, and pipeline end manifold, gripper job, MGR removal from jackets and pipelines. NDT inspection of pipelines & jackets using ultra thickness meter(UT), Cathodic ptection meter(CP), Magnetic particle Inspection(MPI) using coil method and permanent magnet method, riser installation, conductor clamp and anode installation, top side inspection, maintenance of Offshore structures including Spider deck & riser. Mooring & demooing of tankers at SBM and other offshore jobs desired by ONGC from time to time using ONGC owned MSV "SAMUNDRA SEVAK" & Peerless owned DP -II vessels PEERLESS STENA II & "PEERLESS STENA-III".	Yes	Completed Succesfully
10	AFCONS Infrastruture	Feb '97 to May '98	Diving operations for World Bank aided Bombay Sewerage project at Bandra Worli outfalls, at Bandra Reclamation. Underwater cutting & welding, underwater inspection, collection of samples, sea bed survey, desilting inside cofferdam, Sea bed concreting, placing of 80 ton blocks for construction of risers and other diving operations.	Yes	Completed Succesfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
11	<b>Continental Construction Ltd.</b>	May '97 onwards	Diving Services for Construction of Naval Dry dock. Cleaning of sea bed, Sea levelling concrete over Sea bed, Block placing in line & level, underwater concreting between walls.	Yes	Completed Successfully
12	<b>Bhilai Steel Plant</b>	Jun '97 to Apr '98	Desilting of oil catchment pit of Maroda - I reservoir (cooling - pond).	Yes	Completed Successfully
13	<b>B.A.R.C</b>	Dec '97 and Mar '98	Under water work at Cirrus Complex for removal of spool piece, blanking the pipes & installation of spool piece and underwater videography of same.	Yes	Completed Successfully
14	<b>Bhilai Steel Plant</b>	May '98	Installation of TB-12 in P&B station, and underwater breaking of "Reinforced concrete" using specialized underwater Cutting Gear & Equipment.	Yes	Completed Successfully
15	<b>Ambross Ship Management Company Ltd</b>	May '98	Complete inspection of the mooring condition of their L.P.G. Barge formentera including two sunken mooring buoys.	Yes	Completed Successfully
16	<b>U.T.Ltd.</b>	Apr '98 to Jun '98	Replacement of lock gates, pentals , hydraulic cylinders & roller pathways of Victoria Docks at M.P.T. and underwater videography of same.	Yes	Completed Successfully
17	<b>ONGC/ Rig SAGAR SAMRAT</b>	Apr '98	Inspection FWD, Hooks, T-Handle, Pins on both sides of ATF Tank. Removal of Fishing nets, ropes from them.	Yes	Completed Successfully
18	<b>ONGC/ Rig SAGAR SAMRAT</b>	May '98	Cutting & removal of fishing net from the rope guard of propeller. Cleaning of pin holes on ITF Tank on all 4 legs.	Yes	Completed Successfully
19	<b>ONGC/ Rig SAGAR SAMRAT</b>	Sep '98	<b>Type - I</b> inspection on leg 1 & leg 2. Fouled rope removed & mud cleaning is carried out.	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
20	AFCONS Infrastructure	Sep '98 onwards	Diving operations for World Bank aided Bombay Sewerage project at Bandra Worli outfalls, at Bandra Reclamation. Underwater cutting & welding, underwater video-inspection, collection of samples, sea bed survey, desilting inside cofferdam, Sea-bed concreting, placing of 80 ton blocks for construction of risers and other Diving operations.	Yes	Completed Successfully
21	ONGC/ FALCON/ SUBSEA Engineering Pvt. Ltd.	Nov '98 to Nov '00	SPM installation Subsea templates. Subsea template and maintenance of SPM Hoses, submarine pipeline maintenance jobs, Underwater NDT inspection jobs using cathodic potential meter ultrasonic meter, magnetic Particle inspection by coil method and permanent magnet method, videography Subsea buoy, hoses and pipeline end manifold using ONGC owned DPDSV "SAMUDRA PRABHA". Completed a Pre-Engineering Survey on ten Jacket faces for installation of risers. Complete refurbishment of Diving system installed onboard the vessel while in drydock at Bahrain from 28th Oct 99 to 26th Dec 99.	Yes	Completed Successfully
22	ONGC/ Rig SAGAR RATNA	Dec '98	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of port leg spud can in presence of ABS surveyor, to his satisfaction.	Yes	Completed Successfully
23	ONGC/ Rig SAGAR	Jan '99 "	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per <b>ABS requirement</b> .	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
24	<b>Bhilai Steel Plant</b>	Feb '99 to Mar '99	Replacement / Repair of 1000 m.m. dia valve spindle of main inlet valve at Maroda - II reservoir at <b>Bhilai Steel Plant, Bhilai.</b>	Yes	Completed Successfully
25	<b>Dredging &amp; Desiltation Co. Pvt. Ltd. / N.T.P.C</b>	Apr '99	Underwater Videography of Stop logged gates, structure of escape channel , flushing tunnels, silt ejectors at Tanakpur Hydro Eelectric PowerStation at Tanakpur, Bareilly, Uttar Pradesh.	Yes	Completed Successfully
26	<b>ETA Ship Mgmt. Co. Ltd., Chennai</b>	May '99	Examination of the underwater body including radar, propeller, visible parts, of the stern bearing assembly and sea chests by underwater video cameras and recording in video cassette. Assessment of Stern bearing wear down and measurement of radar pintle clearances. Visual checking of Oil lubricating bearings for oil leaks. Photographic documentation of above underwater parts. External examination of the salt water system, sea valves and their attachments to sea chests/Side shell of their vessel M.V. Gem Of Madras at Chennai harbour in presence of surveyor from <b>ABS &amp; IRS</b>	Yes	Completed Successfully
27	<b>ESSAR Shipping, Mumbai.</b>	Jul '99	Examination of the underwater body including radar, propeller, visible parts, of the stern bearing assembly and sea chests by underwater video cameras and recording in video cassette. Assessment of Stern bearing wear down and measurement of radar pintle clearances. Photographic documentation of above underwater parts. External examination of the salt water system, Side shell of their vessel M.V. NAND HARI in lieu of 2½ yearly dry docking at Chennai harbour in presence of surveyor from <b>AMERICAN BUREAU OF SHIPPING.</b>	Yes	Completed Successfully
28	<b>Dyckerhoff &amp; Widmann Ltd.</b>	Sep '99	Inspection of existing auxillary Outfall at Worli. Inspection of Worli Risers to check flow of sewage from Diffusors. Inspection of Temporary plugs & ports.	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
29	<b>Dyckerhoff &amp; Widmann Ltd.</b>	Sep '99	Removal of blockage at existing auxillary outfall at Bandra using Toyao pump & Skid mounted Pollman Pump. Length of pipe line 170 Mts (Approx.) & 3.5mts. diameter.	Yes	Completed Succesfully
30	<b>JINDAL DRILLING &amp; ALLIED INDUSTRIES LTD.</b>	Oct '99	Retrieving of C- Section Well Head from Sea Bed near their Jack up Rig <b>ED – HOLT at Bombay High.</b>	Yes	Completed Succesfully
31	<b>ONGC/ Rig SAGAR GAURAV</b>	Oct '99	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs.Type III cleaning of same using Pneumatic chipper, wire brush etc.Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor,to his satisfaction.The above survey was carried out in lieu of dry docking as per <b>ABS requirement.</b>	Yes	Completed Succesfully
32	<b>ONGC/ Rig SAGAR JYOTI</b>	Oct '99	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs.Type III cleaning of same using Pneumatic chipper, wire brush etc.Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor,to his satisfaction.The above survey was carried out in lieu of dry docking as per <b>ABS requirement.</b>	Yes	Completed Succesfully
33	<b>ONGC/ Rig TRIDENT II</b>	Oct '99	<b>TYPE – II</b> Job involving, Scouring survey of Fwd', Port & Strbd' Leg spudcan of Rig at Bombay High. Searching and retrieval of Fallen Pump from the seabed.	Yes	Completed Succesfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
34	ONGC/ Rig KEDARNATH	Nov '99	<b>TYPE – II</b> Job involving, Scouring survey of Fwd', Port & Strbd' Leg spudcan of Rig at Bombay High. Searching and retrieval of Fallen Pump from the seabed.	Yes	Completed Successfully
35	ONGC/ Rig SAGAR UDAY	Nov '99	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs.Type III cleaning of same using Pneumatic chipper, wire brush etc.Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor,to his satisfaction.The above survey was carried out in lieu of dry docking as per <b>ABS requirement.</b>	Yes	Completed Successfully
36	ONGC/ Rig SAGAR JYOTI	Feb '00	<b>TYPE – III</b> Job involving, desilting & Underwater cutting of the damaged using Broco cutting torch and cutting gear.	Yes	Completed Successfully
37	BRIHANMUMBAI MUNICIPAL CORPORATION	Apr '00 to May '00	Underwater inspection of Pump Sump, weed screen, desilting & cleaning of pump sump & hydrographic survey of intake channel & river course at Pise Pumping station, Mumbai.\	Yes	Completed Successfully
38	ONGC/ Rig SAGAR PRAGATI	Apr '00	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs.Type III cleaning of same using Pneumatic chipper, wire brush etc.Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor,to his satisfaction.The above survey was carried out in lieu of dry docking as per <b>ABS requirement.</b>	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
39	NTPC/ UPSEB	Jul '00	Underwater Grouting & stopping of water leakage from cooling water R.C.C duct of Unit no.5 of 2x 500 M.W "B" Power Station, Anpara Thermal Project, Anpara, Distt Sonebhadra , Uttar Pradesh.	Yes	Completed Successfully
40	ONGC/ HIMACHAL ALKALIES	Nov '00 to May '01	SPM Installation, installation of Subsea templates and maintenance of SPM. Providing qualified Indian Diving Personnel onboard ONGC owned DPDSV "SAMUNDRA PRABHA" operating at Bombay High	Yes	Completed Successfully
41	ONGC/ Rig SAGAR GAURAV	Dec '00	<b>TYPE – II</b> Job involving, Scouring survey of Fwd', Port & Strbd' Leg spudcan of Rig at Bombay High. Salvage of fallen Flea Gas Burner from the sea bed.	Yes	Completed Successfully
42	REBUILD STRUCT ASSOCIATES MPT-GOA	Nov '00 to Dec '00	Underwater Survey & Videography of Berth no . 8,9,10 & 11 for Murmagao Port Trust, at Goa.	Yes	Completed Successfully
43	ONGC/ Rig SAGAR PRAGATI	Feb '00	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs.Type III cleaning of same using Pneumatic chipper, wire brush etc.Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor,to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
44	ONGC/ Rig SAGAR SAMRAT	Feb '01	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Successfully
45	ONGC/ Rig SAGAR LAXMI	Apr '01	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Successfully
46	CSL INS NIREEKSHAK	Oct '01	Refurbishment of 12 man saturation diving system on INS Nireekshak at Cochin Shipyard Ltd. including repairing, testing, commissioning & obtaining LRS certificate on turn key basis. Work involved hydrotesting of 29 gas storage Kelley volume 2.2 m <sup>3</sup> test pressure 300 Kg/cm <sup>3</sup> & hydro / pneumatic testing of 02 nos DDCs, TUP, diving bell & TUB hub at a working pressure of 30 Kg /cm <sup>3</sup> & testing pressure 34 Kg /cm <sup>3</sup> . Major overhauling of diving bell & trolley hydraulic system. 02 nos. W & J high pressure compressor working pressure 247 bar, diver hot water & sanitary system, DDC, TUP & diving bell blower CO <sub>2</sub> scrubber system, overhauling & testing of DDC & SDC control	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
			console, valves regulator pressure relief valves, installation & commissioning of OBB hydro system, Degutting / Regutting of Therapeutic chamber container accessories panels, communication & lighting. Major overhauling & testing of chamber ECU system CMU compressor & HCU units. Overhauling & commission of various system related pumps. Leak rectification on submarine rescue bell. Installation of CO2 scrubber units, overhauling of pneumatic winch, installation of new air diving umbilical, excursion umbilicals & function testing, Re-socketing & load testing of SDC lifting wires, 02 nos. guide line wire & hyd. system & wire brake system.		
47	TANVIR BAVI POWER PROJECT	Dec '01	Laying of underwater intake & outlet pipelines laying of bedding material Block placing laying of Geo-fabric, placing armour stones for protection of slopes, etc.	Yes	Completed Successfully
48	LAND & COAST	Sep '01	Underwater survey of 4 mooring, anchor blocks. Inspection and testing the chain support buoys and the piling system of the HPCL oil jetty.	Yes	Completed Successfully
49	ONGC/ Rig SAGAR JYOTI	Nov '01	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
50	ONGC/ Rig SAGAR GAURAV	Nov '01	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs.Type III cleaning of same using Pneumatic chipper, wire brush etc.Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor,to his satisfaction.The above survey was carried out in lieu of dry docking as per <b>ABS requirement.</b>	Yes	Completed Successfully
51	ONGC/ Rig SAGAR KIRAN	Dec '01	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs.Type III cleaning of same using Pneumatic chipper, wire brush etc.Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor,to his satisfaction.The above survey was carried out in lieu of dry docking as per <b>ABS requirement.</b>	Yes	Completed Successfully
52	ONGC/ Rig SAGAR SAMRAT	Mar '02	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs.Type III cleaning of same using Pneumatic chipper, wire brush etc.Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor,to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Successfully
53	ONGC/ Rig SAGAR PRAGATI	Apr '02	<b>Type - I</b> inspection on leg 1 & leg 2. Fouled rope removed & mud cleaning is carried out.	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
54	ONGC/ Rig SAGAR SHAKTI	May '02	TYPE - III job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per <b>ABS requirement.</b>	Yes	Completed Successfully
55	Hachiuma Steamship Co. Ltd., Japan	May '02	Inspection of Rudder Pintal, Shaft, Rope guard, Propeller and gland seal carried out.	Yes	Completed Successfully
56	KIER Intl./ PPN Offshore works	Jul '02	Inspection of the pipelines of the power project & sealing of pipe joints in area of Teekay Coupling using additive.	Yes	Completed Successfully
57	HPSEB / Thirot Hydrel Project	Jun '02	Removal of slush / silt from the forebay reservoir of Thirot Hydrel Project.	Yes	Completed Successfully
58	Aquarest Systems	Apr '02	Providing of diving services for sealing Koyna Dam water reservoir Block Joints ie. inspection, cleaning, chipping, drilling, putty application, nozzles fixing, grouting, rubber fixing & videography.	Yes	Completed Successfully
59	ONGC/Rig SAGAR GAURAV	Aug '02	TYPE II & IV job involvind cleaning sea growth on castings of raw water pumps & videography of the area cleaned.	Yes	Completed Successfully
60	ONGC/Rig Aban-II	Oct '02	Providing of diving services for the placing of corrosion cap & for carrying out sea bed survey.	Yes	Completed Successfully
61	AFCONS / Tanir Bavi Power Project	Oct '02	Providing of diving services for cutting of pile in pump house.	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
62	ONGC Rig SAGAR GAURAV	Nov '02	Providing of diving services for the purpose of cutting of damaged portion of spud can & carrying out NDT of the weld after installation & welding of new plate.	Yes	Completed Successfully
63	ONGC Rig SAGAR UDAY	Dec '02	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per <b>ABS requirement</b> .	Yes	Completed Successfully
64	ONGC/Rig Aban-II	Dec '02	Providing of diving services for the placing of corrosion cap & for carrying out sea bed survey.	Yes	Completed Successfully
65	Dyckerhoff & Widmann Ltd.	Jan '03	Inspection of existing auxillary outfall at Bandra. Inspection of Bandra Risers and cleaning of port holes and removal of bolts of port cover at Bandra Risers No.1 to 10.	Yes	Completed Successfully
66	ONGC/Rig Aban-II	Mar '03	Providing of diving services for the placing of corrosion cap & for carrying out sea bed survey.	Yes	Completed Successfully
67	Dyckerhoff & Widmann Ltd.	Mar '03	Inspection of existing auxillary outfall at Bandra. Inspection of Bandra Risers and cleaning of port holes and removal of bolts of port cover at Bandra Risers No.1 to 10.	Yes	Completed Successfully
68	ONGC/Rig Aban-II	Apr '03	Providing of diving services for the placing of corrosion cap & for carrying out sea bed survey.	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
69	ONGC Rig SAGAR RATNA	May '03	<b>TYPE-III</b> job involving, Magnetic Particle Inspection of Spud Can to chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. <b>Type III</b> cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement. <b>Type IV</b> job including cleaning of spud can jet from bottom using water jetting unit using air. This work was performed at a depth of 60 mtrs	Yes	Completed Successfully
70	Rihand Dam Sonebhadra	May '03	Mapping of Cracks in concrete structure of Rihand Dam.	Yes	Completed Successfully
71	Aquarest Systems	May '03 to July '03	Providing of diving services for sealing upstream Block Joints of Koyna Dam stage - I. Inspection, cleaning, chipping, drilling, putty application, nozzles fixing, grouting, rubber sheet fixing & videography.	Yes	Completed Successfully
72	ONGC/Rig Aban-II	Aug '03	Providing of diving services for Seabed Survey within 200m radius for new positioning of Rig Aban - II.	Yes	Completed Successfully
73	SEAMEC LTD	Nov '03 to May '04	Providing of diving personnel on SEAMEC-I & SEAMEC-II For ONGC job in Bomay High for SEAMEC LTD.	Yes	Completed Successfully
74	Aquarest Systems	Mar '04 to May '04	Providing of diving services for sealing upstream Block Joints of Koyna Dam stage - I. Inspection, cleaning, chipping, drilling, putty application, nozzles fixing, grouting, rubber sheet fixing & videography.	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
75	Aquarest Systems	Jul '04	Providing of Diving Services for De-Slugging and De-silting of CWPH, RWPH, IDCT Bottom Floor and other area	Yes	Completed Successfully
76	ONGC/Rig Malaviya-3	Sep '04	Providing of diving services for Seabed Survey within 200m radius	Yes	Completed Successfully
77	Archirodon Const.Co.	Nov '04	Providing of Diving Services for Repairs of existing Blocks at Qatar Petroleum Multi Product Berth in Mesaieed Industrial	Yes	Completed Successfully
78	V Ships Florida L.C U.S.A	Jan '05	Providing of Diving Services for Underwater Inspection on the Vessel BUNGA MELAWIS DUA TBRN TRADEWIND FORCE The above Inspection was carried out as per ABS requirement	Yes	Completed Successfully
79	Aquarest Systems	Jan '05	Providing of diving services for salvage of trunks at Koyna Dam	Yes	Completed Successfully
80	ONGC/Vessel Garware - II	Feb '05	Providing of diving services for Seabed Survey within 200m radius	Yes	Completed Successfully
81	Garware II Vessel	Mar '05	Underwater inspection of Rudder palm bolts/bottom shoe onboard MV Garware II.	Yes	Completed Successfully
82	COMACOE	May '05	Underwater inspection of Jackup Lay	Yes	Completed Successfully
83	Aquarest Systems	Jun '05	Underwater inspection of water flooded tunnels of Ghjatghar Hydroelectric Project , Chonle, Shahpur, Dist.-Thane.	Yes	Completed Successfully
84	Jhansi Division	Aug '05	Underwater inspection and underwater repair work for dam	Yes	Completed Successfully
85	Favourite Marine Services	Sep '05	Underwater inspection and videography onboard vessel MV Hammurabi.	Yes	Completed Successfully
86	ONGC Rig SAGAR RATNA	Sep '05	Underwater inspection of NDT job onboard Rig SAGAR RATNA.	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
87	SEAMEC Ltd.	Dec '05	Providing diving team & diving equipment onboard SEAMEC-1 for underwater inspection & sea chest cleaning and blank the sea chest and take it out.	Yes	Completed Successfully
88	Diver Delta Services, Dubai,	Jan '05 to April '05	Carried out installation of three spool pieces each 30 inches at Mubarak Oil Field (Flange to Flange) using Barge Arbain Ainn		
89	Advance Oil and Gas Consultant	Apr '06	Provided two LARS on rent to AOGC to carry out diving work	Yes	Completed Successfully
90	ONGC Rig SAGAR UDAY	Apr '06	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs . Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Successfully
91	Cochin Shipyard Ltd/ ONGC Rig SAGAR KIRAN	May '06	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Successfully
92	SONSUB International	Jul '06	Providing Diving services & equipment for Recovery of ROV	No	The ROV could not be recovered as no reference location was provided

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
93	ONGC/ Rig SAGAR BHUSHAN	Jul '06 & Sep'06	<b>TYPE - I</b> job involving Providing diving team & diving equipment onboard <b>Rig SAGAR BHUSHAN</b> underwater inspection & sea chest cleaning and blank the sea chest and take it out. <b>Type - IV</b> job involving visual inspection of Seabed and Scouring Survey upto a depth of 60 mts	Yes	Completed Successfully
94	OA0 GAZPROM	Sep '06	Provision of Diving Services for drilling exploration wells in blocks on . Semi Submersible Rig GLAXY DRILLER for poster of Latching BOP and unlatching BOP. Performed a Scour Survey within 3m radius of bore. The job was performed upto a depth of 60 mtrs. <b>Location:</b> Bay Of Bengal, INDIA.	Yes	Completed Successfully
95	ONGC SAGAR UDAY JYOTI	Nov '06	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per <b>ABS requirement.</b>	Yes	Completed Successfully
96	ONGC SAGAR BHUSHAN	Dec '07	Type-I Type-II job involving underwater sea chest cleaning & hull inspection as per ABS requirement	Yes	Completed Successfully
97	M/S. OFFSHORE SUBSEA WORKS	Nov '06 to Jun '07	Installation of S.B.M and spool piece (36 "). Carried out Inspection of Sea Bed. The DSV used was DSV Enad.	Yes	Completed Successfully
98	Pt. A.O.G.C	Jan '07	Provided a LARS a rent	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
99	ONGC SAGAR SHAKTI	Jan '07	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per <b>ABS requirement</b> .	Yes	Completed Successfully
100	ONGC SAGAR PRAGATI	May '07	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs. Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Successfully
101	Pt. Allied Offshore	June '07	Provided a LARS and a DDC on rent	Yes	Completed Successfully
102	FAVOURITE MARINE WORKS	July '07	Surveying and plugging of 3 Nos Hole at TST Tank on board at BPS. The Vessel was <b>IBN BASSAM</b>	Yes	Completed Successfully
103	PROSAFE PRODUCTION SERVICES PTE. LTD.	JULY '07 TO AUG '07	Completed blanking, deblanking, plugging and deplugging on <b>FSO Endeavor</b> . Ultrasonic Thickness measurements of the stern of <b>FSO Endeavor</b> . Also Inspection of Normor Buoy was performed including CVI, GVI and MPI. The project was executed using the now self owned vessel <b>M V Sonali</b> .	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
104	Cochin Shipyard/ Leighton Contracors India Pvt. Ltd. / West Coast Underwater Contractors Sdn. Bhd.	Sep '07 to Dec '07	We provided all kind of diving assistance required for SBM installation. The assistance involved provision of all diving equipments and personnel whatsoever required alongwith execution of all activities underwater. A spool piece that was 42 inches in diameter was also installed. The project was executed from Leighton owned Barge.	Yes	Completed Succesfully
105	PT . Advanced Oil and Gas Consulting	January '08 to May '08	Provision of Diving Services for various operations at Heera Field for M/s. Punj Lloyd on the HRPC project of M/s. ONGC. The Diving Services include provision of a complete Air Diving Team and Air Diving Equipments onboard Punj Lloyd Owed Barge <b>L B Mahesh</b> . The diving services include stinger check for the pipe laying barge L B Mahesh.	Yes	Completed Succesfully
106	NaftoGaz India Pvt. Ltd	Feb '08 to May '08	The Scope of Work Includes performing Jacket Face Pre-Engineering Survey on 31 platforms for the purpose of Installation of 52 J tubes distributed on above said 31 platforms. The project is being executed for M/s. ONGC, who owns the platforms at Bombay High. The project was executed from our self owned vessel M. V Sonali	Yes	The scope was extended to survey of 33 platforms and the same was completed within the given time for 31 platforms
107	ONGC Rig SAGAR RATNA	March '08	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs . Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Succesfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
108	ONGC Rig SAGAR UDAY	March '08	<b>TYPE - III</b> job involving, Magnetic Particle Inspection of Spud Can to Chord Gusset plates, Vertical welds of the chords to the spud can middle portion, Girth welds of the chords to spud can horizontal slope, welds on the spud can bottom on all chords of Port, Stbd' & Fwd' legs . Type III cleaning of same using Pneumatic chipper, wire brush etc. Videography of all gusset plates & side and bottom plates of spud cans in presence of ABS surveyor, to his satisfaction. The above survey was carried out in lieu of dry docking as per ABS requirement.	Yes	Completed Successfully
109	Samsung Heavy Industries (SHI)	March '08 Ongoing	The scope of work includes Boatlanding & Riser Guard Survey, Jacket Anode Survey below -31meter, Removal of Grout /Flood lines and reach rods at elevation - 25.00 meters, Removal of Skirt pile guides 12 no's at elevation - 10.00 meters, Removal of Skirt pile guide ( EL: =0 / 4 set ), Mud Mat Survey at EL – 53.6M, Removal of Kneebrace and Hold by Rope on Riser pipe, Inspection for positioning of Rockarm at Seabed, Measurement of Tie-in Spool ( 10' & 20' ), Rockarm recovery from seabed WT .approx – 90Ton, Tie-in spools and installation (( Including Preparation and action for Pipeline shifting ,if required ), Hydro-test assistance of 10" & 20" lines, ( Final Check/Inspection and Repair etc., during Hyd' Test ). The above work was carried out on the <b>ONGC</b> owned <b>BCPA-2</b> jacket located in the <b>Bassein Field, Mumbai</b>	Yes	The Phase one was completed on 10th Apr '08 and the completion certificate for the same is available. Due to availability of Marine Spread for a limited time from SHI, not all scope of work could be completed. But in spite of the limited work front available, we completed 90% of the scope work assigned within a remarkable working time of 12 days of the allotted 35 days. The project was deemed to be complete on 3rd April 2009.
110	ONGC Rig SAGAR VIJAY	Aug '08	Underwater Video Inspection on Sagar Vijay was carried in lieu of dry dock	Yes	Completed Successfully

# United Divers Pvt. Ltd.

S No.	CLIENT	PERIOD	JOB DESCRIPTION	JOB COMP CERT	REMARKS
111	<b>Pt. Advanced Oil and Gas Consulting</b>	Nov '08 May'09	Provision of Air and Sturation Diving Services for various operations at Heera Field for the HRPC project for M/s. ONGC, under it's contractor <b>Punj Lloyd</b> . The Diving Services include provision of a complete Saturation Spread, Mixed Gas Diving Spread and complete diving team capable of supporting 24 hours diving operations for executing the given scope of work. The scope of work includes Jacket Installation, 'J' tube and I' tube installation, subsea pipeline installation, intallation of tie-in spools, and surveys. We have provided our self owned <b>4 Man Saturation Diving System (ULIS)</b> . The work is being executed from the the Punj Lloyd owned <b>Barge "Madhwa"</b> .	Yes	Completed succesfully
112	<b>NaftoGaz India Pvt. Ltd</b>	Dec '08 May '09	The Scope of Work Includes performing Jacket Face Pre-Construction Survey on 31 platforms for the purpose of Installation of 54 J tubes distributed on above said 31 platforms. The project is being executed for <b>M/s. ONGC</b> , who owns the platforms at Bombay High.	No	The executed job is currently awaiting approval from M/s. ONGC

DIVING TOWARDS SUCESS